



## DOWSIL™ 784 Silicone Sealant

Medium/high modulus acetoxy silicone sealant

### Features & Benefits

- Fungus and mildew resistant
- Good elasticity
- Conforms to ISO 11600-G-20LM
- Resistant to ozone, ultra-violet radiation and temperature extremes

### Applications

- DOWSIL™ 784 Silicone Sealant is a one-part, silicone sealant. It has good adhesion to glass, aluminum and other non-porous construction substrates. It is ideal for use as a weather-sealant in areas that may be subject to high humidity, such as windows in bathrooms and kitchens where mold growth can occur, as it contains a fungicide to prevent mold growth.

### Typical Properties

Specification Writers: These values are not intended for use in preparing specifications.

Test	Property	Unit	Result
	Cure system		Acetoxy
	Standard colors		Clear, white, gray, brown, black, aluminum
	Application temperature	°C °F	+5 to +40 +41 to +104
CTM <sup>1</sup> 97B	Specific gravity	g/ml	1.02
CTM 364C	Extrusion rate	g/minute	220
CTM 98B	Skin-over time (23°C or 73°F, 50% R.H.)	minutes	12
CTM 95A	Tack-free time (23°C or 73°F, 50% R.H.)	minutes	20
CTM 663A	Cure rate (23°C or 73°F, 50% R.H.)		
	1 day	mm	2
	3 days	mm	4.0

1. CTM: Corporate Test Method, copies of CTMs are available on request.

## Typical Properties (Cont.)

Test	Property	Unit	Result
<b>2 mm thickness S2 dumb-bells (ISO<sup>2</sup> 37)</b>			
CTM 137A	E-modulus 100%	MPa	0.41
CTM 137A	Tensile strength	MPa	1.8
CTM 137A	Elongation at break	%	550
<b>12x12x50 mm size T.A. joint (ISO 8339/DIN2-8339<sup>3</sup>)</b>			
CTM 677	E-modulus 100%	MPa	0.4
CTM 677	E-modulus 60%	MPa	0.35
CTM 677	Tensile strength	MPa	0.57
CTM 677	Elongation at break	%	200
CTM 99E	Hardness (Shore A)		22
BS5889 Type B <sup>4</sup>	Joint movement capability	%	20

2. ISO: International Standardization Organization.
3. DIN: Deutsche Industry Norm.
4. BS: British Standard.

## Technical Specifications and Standards

Conforms to ISO 11600-G-20LM. Performance related to mildew and fungus resistance has been tested in accordance with the ISO-Norm 846.

## How to Use

### Surface Preparation

Ensure that surfaces to be sealed are clean, dry, sound and free from frost, release agents, old sealants and other contaminants which could impair adhesion. All surfaces should be cleaned and degreased by wiping with a suitable solvent such as DOWSIL™ R-40 Universal Cleaner on a clean oil- and lint-free cloth before application of sealant.

Note: When using any solvent, always provide adequate ventilation. Avoid heat, sparks and open flames. Use solvent resistant gloves. Observe and follow all precautions listed on solvent container label.

### Masking

Areas adjacent to the joints should be masked with tape to prevent contamination of the substrates and to ensure a neat sealant line. Masking tape should be removed immediately after tooling.

### Priming

DOWSIL™ 784 Silicone Sealant offers good adhesion to most nonporous substrates found in glazing applications. However, due to the wide variety of coatings available, we recommend that substrates be tested for adhesion prior to use. The use of a primer will maximize adhesion of the sealant particularly where cleaning is a problem, for example, mill finished aluminum. For specific advice, please refer to the Primers' Guide or contact one of Dow's Regional Service Centers for technical assistance.

## How to Use (Cont.)

### Back-up Materials

When back-up material is required, a closed cell polyethylene backer rod is recommended. Low tack polyethylene tape should be used in joints too shallow to allow the use of a backer rod. Back-up materials provide back pressure and prevent three sided adhesion that limits sealant movement capability.

### Finishing


The joint should be tooled within 5 minutes of application to ensure good contact between the sealant and the substrate. Tooling of the sealant also gives a smooth, professional finish. Spatulas for tooling purposes are available from Dow.

### Clean-up


Excess sealant may be cleaned off tools and non-porous surfaces whilst in an uncured state using DOWSIL™ R-40 Universal Cleaner. If sealant is misapplied to porous substrates, it should be left until it is just cured and then removed by peeling, cutting or other mechanical means. Care should be taken not to damage plastic or coated surfaces.

### Joint Design

The sealant joint width should be designed to accommodate the movement capability of the sealant. When designing joints using DOWSIL™ 784 Silicone Sealant, the minimum width should be 6 mm. For joints between 6–12 mm wide, a seal depth of 6 mm is required. For joints above 12 mm wide, a width to depth ratio of 2:1 should be used. In situations where fillet joints are needed, a minimum of 6 mm sealant bite to each substrate is recommended.

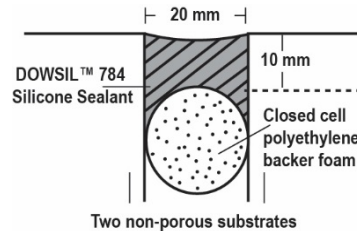

**Figure 1:** Deep joint

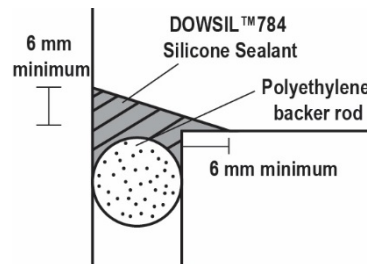

**Figure 2:** Fillet joint

## Handling Precautions

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE ON THE DOW WEBSITE AT DOW.COM, OR FROM YOUR DOW SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CUSTOMER SERVICE.

**Usable Life and Storage**

When stored in cool, dry conditions below 30°C (86°F) in the original unopened containers, DOWSIL™ 784 Silicone Sealant has a usable life of 27 months from the date of production.

**Limitations**

DOWSIL™ 784 Silicone Sealant is not recommended for use on porous substrates such as concrete, stone, marble or granite. DOWSIL™ 784 Silicone Sealant should not be used in contact with the edge seal of an insulated glazed unit.

DOWSIL™ 784 Silicone Sealant is not recommended for use with certain plastics, for example, PVC-U where high thermal movement may occur.

Do not use DOWSIL™ 784 Silicone Sealant on bituminous substrates, substrates based on natural rubber, chloroprene or EPDM or on building materials which might bleed oils, plasticizers or solvents. Do not use DOWSIL™ 784 Silicone Sealant in a totally confined space because the sealant requires atmospheric moisture to cure. Because acetic acid is released during curing, it can corrode mirror silver and sensitive metals such as copper, brass and lead. DOWSIL™ 817 High Modulus Adhesive should be used for this application. DOWSIL™ 784 Silicone Sealant is not recommended for use on submerged joints or in joints where physical abuse or abrasion is likely to occur.

DOWSIL™ 784 Silicone Sealant must not be used for construction or repair of aquarium systems.

DOWSIL™ 784 Silicone Sealant should not be used in conjunction with laminated glass.

DOWSIL™ 784 Silicone Sealant is not recommended for structural glazing or insulated glazing applications.

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

**Health and Environmental Information**

To support customers in their product safety needs, Dow has an extensive Product Stewardship organization and a team of product safety and regulatory compliance specialists available in each area.

For further information, please see our website, [dow.com](http://dow.com) or consult your local Dow representative.

**Disposal Considerations**

Dispose in accordance with all local, state (provincial) and federal regulations. Empty containers may contain hazardous residues. This material and its container must be disposed in a safe and legal manner.

It is the user's responsibility to verify that treatment and disposal procedures comply with local, state (provincial) and federal regulations. Contact your Dow Technical Representative for more information.

## **Product Stewardship**

Dow has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with Dow products - from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

## **Customer Notice**

Dow strongly encourages its customers to review both their manufacturing processes and their applications of Dow products from the standpoint of human health and environmental quality to ensure that Dow products are not used in ways for which they are not intended or tested. Dow personnel are available to answer your questions and to provide reasonable technical support. Dow product literature, including safety data sheets, should be consulted prior to use of Dow products. Current safety data sheets are available from Dow.

dow.com

**NOTICE:** No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

